




Front View

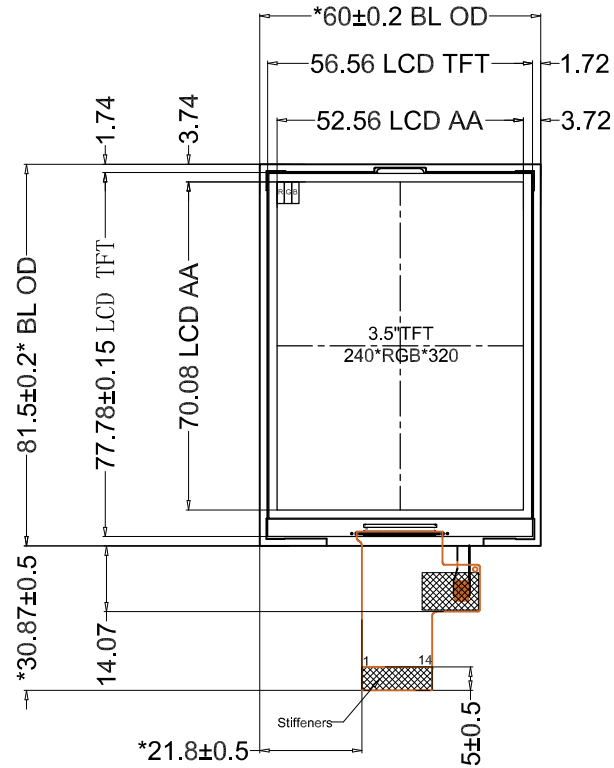


Side View

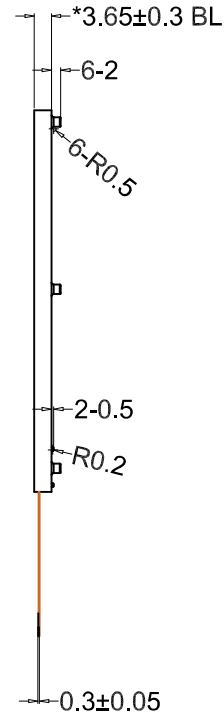

Rear view

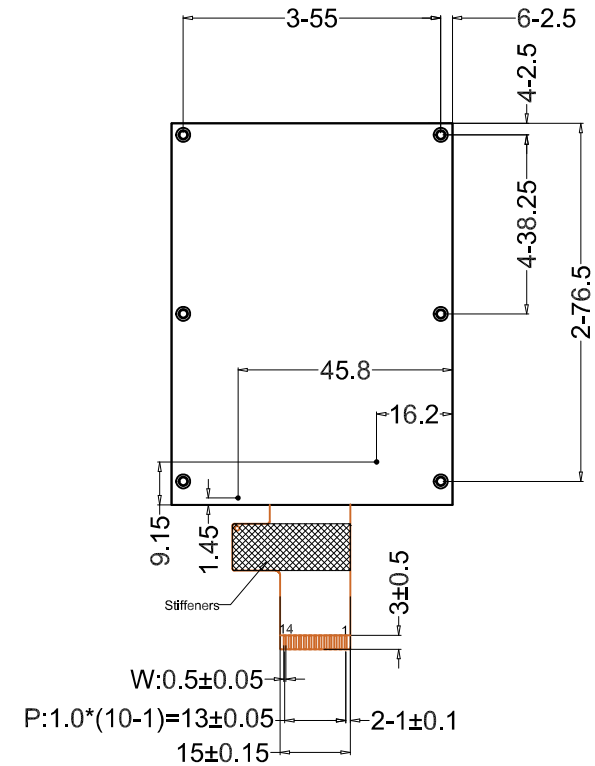

PIN	SYMBOL
1	VCC
2	GND
3	RESET
4	CS
5	D/CX
6	GND
7	SCL
8	SDI
9	SDO
10	GND
11	A1
12	A2
13	K1
14	K2




LCM NOTES:

1. DISPLAY TYPE: 3.5 INCH TFT /TRANSMISSIVE
2. BACKLIGHT: 6 CHIP WHITE LED, 6PCS
VF =8.1~10.25 V;IF = 20mA/LED
3. OPERATING TEMP: -20°C~+70°C
4. STORAGE TEMP: -30°C~+80°C
5. LCD IC:ST7789V2
- 6.POL:O-Film
- 6.Luminance:500cd/m2(TYP)
7. "()"reference dimension."*"critical dimension
8. RoHS Compliant

1.0	2021.09.22	First issue	
REV.	DATE	MODIFICATION	

INTERFACE	SPI Interface
VIEWING DIRECTION	12 O'clock
Gray DIRECTION	6 O'clock

GlobalTech Display			
Material code: TBD		PART NO. GLT035240320WH1	
DWN Li Huang 2021.09.22	REV. 1.0	SHEET OF 1/1	
CHKD Li Huang 2021.09.22	TOLERANCE UNLESS SPECIFIED ±0.2		
PROJECTION 3rd ANGLE		UNIT mm	SCALE 1:1